

FLUA®



SATELLITE2.0 IN TRIMLESS



This series of products shaped like a satellite. The most important feature is that the product's unique structure allows light 350 degree rotation, convenient different angles of illumination. This family contains the ceiling surface mounted, ceiling recessed mounted and boom type installation , to meet all your requirement.

Designer	RUAN XIAO MING
Sales status	On Sale
Product classification	Interior
Model	170712EA

WWW.FLUA.COM


Installation information

Area	Ceiling
Method	Recessed
Cut hole size	Φ155mm
Embedded height	/

Technical general

System power	18.5W	
Flux	1094lm	
Beam angle	36°	
Material	Aluminum	
Appearance color	PAW-WBL	
Size	220*144*80mm	
Adjustable angle	Available	
Ingress protection	IP20	
Input voltage	220-240VAC	50/60Hz
Electrical level	Class II	

Photometric graph

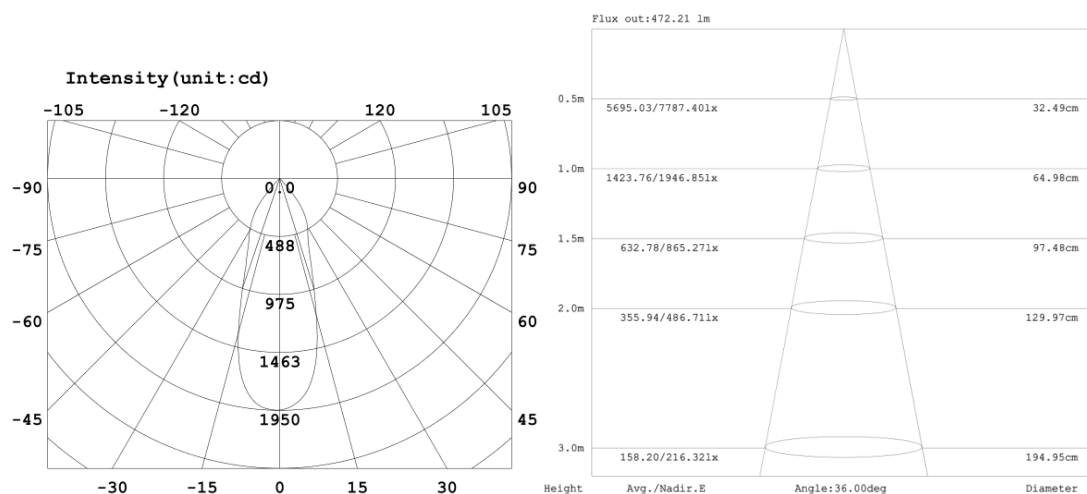

Electrical parameters

Driver brand	FLUA
Driver type	FLUA018H0700NCMA
Electrical installation	External

Light source parameters

Brand	LEDTEEN
Type	LT-A3015I
Power	15.7W
Light color	WW
Color temperature	3000K
CRI	90

Other options



Beam angle	28° 46°
Color temperature	2700K 4000K 5000K 6500K
Color	/
Appearance color	PAB-WWH/PAB/PAB-WGL/PAB-WSG/PAW/ PAW-WGL/PAW-WSG

Dimming model	170712EDT
Dimming mode	TRIAC dimming
Driver brand	MEAN WELL
Driver type	PCD-16-700B
Input voltage	180-295VAC 50/60Hz

Dimming model	170712EDX
Dimming mode	0-10V dimming
Driver brand	HEP
Driver type	LBC20W700-1CZ UNI
Input voltage	120-277VAC 50/60Hz

3D module

Line drawing

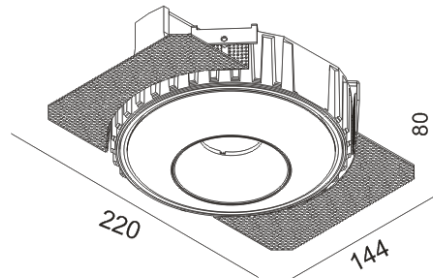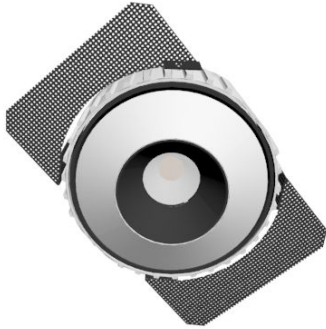

Unit: mm

Instructions

