

FLUA®



AGEIR M



This series contains different power wattage: 10W / 15W / 25W. Two versions for selection: with frame design makes the installation easier, the trimless design makes the ceiling much more clean.

Designer	RUAN XIAO MING
Sales status	On Sale
Product classification	Interior
Model	150212EA

WWW.FLUA.COM


Installation information

Area	Ceiling
Method	Recessed
Cut hole size	Φ 150mm
Embedded height	/

Technical general

System power	22.1W	
Flux	1162lm	
Beam angle	25°	
Material	Aluminum, Steel	
Appearance color	WWH-WBL	
Size	Φ161*160.5mm	
Adjustable angle	Available	
Ingress protection	IP20	
Input voltage	100-240VAC	50/60Hz
Electrical level	Class II	

Photometric graph

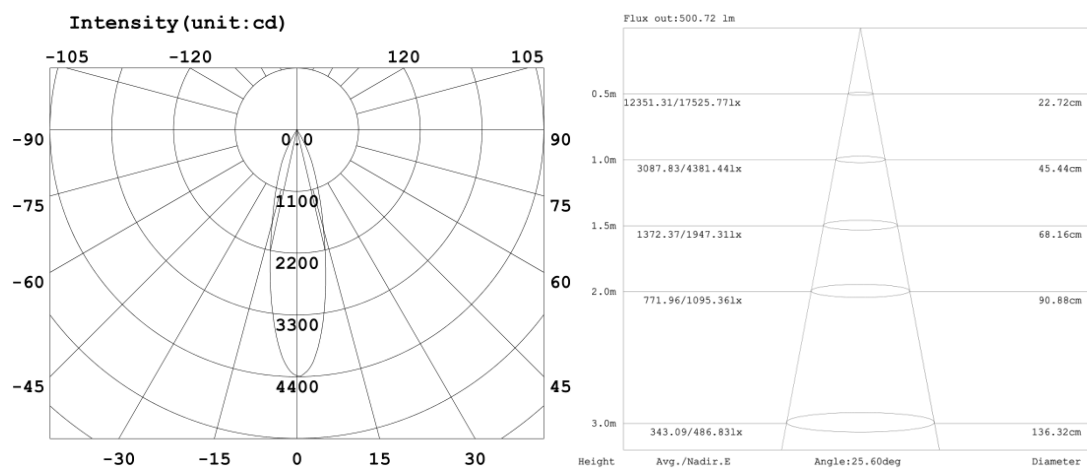

Electrical parameters

Driver brand	HEP
Driver type	LBC20W500-Z
Electrical installation	External

Light source parameters

Brand	LEDTEEN
Type	LT-A3030I
Power	18.1W
Light color	WW
Color temperature	3000K
CRI	90

Other options


Beam angle	40°
Color temperature	2700K 4000K 5000K 6500K
Color	/
Appearance color	WWH/ WBL-WWH/ WBL/ WWH-WGL/ WBL-WGL/WWH-WSG/ WBL-WSG

Dimming model	150212EDT
Dimming mode	TRIAC dimming
Driver brand	HEP
Driver type	LLTC20W500LR-Z
Input voltage	100-240VAC 50/60Hz

Dimming model	150212EDX
Dimming mode	0-10V dimming
Driver brand	HEP
Driver type	LBC20W500-1CZ
Input voltage	120-277VAC 50/60Hz

3D module

Line drawing

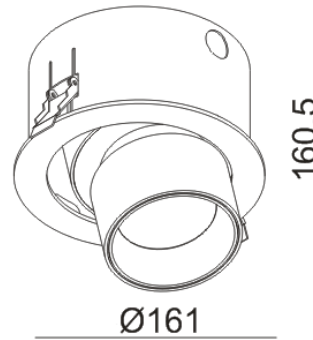

Unit: mm

Instructions

